Schréder Experts in lightability™

STYLAGE bracket





The STYLAGE bracket - just like the luminaire of the same name - combines a classic style with a touch of modernism. It creates a distinctive ambiance for both historical centres, to respect their character, and more modern spaces and environments.

This large family of brackets adapts to your needs by offering multiple variants (single, double, lateral and wall).

It is made of die-cast aluminum and is available in all standard Schréder colours.

Certified for the loads defined in EN40, the STYLAGE bracket range can be installed on poles for CE marking.




Technical information

GENERAL

Housing	Die-cast aluminum
Finish	Polyester powder-coating
Colour	AKZO 900 grey sanded Any RAL or AKZO colour upon request

Pull wire included	Yes				
Sea-side coating	Available upon request				

DIMENSIONS

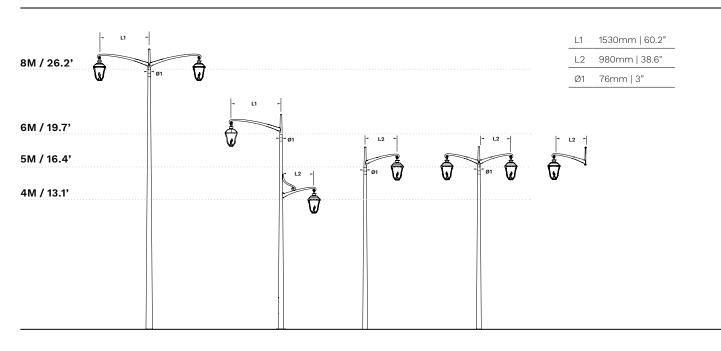

STYLAGE bracket

PRODUCT VARIANTS

				To pole		To luminaire	
Туре	Length (mm)	Reference	Diameter (mm)	Tube penetrating (male)	Enclosing (female)	Wall	Suspended 1" female (for male interface luminaire side)
STYLAGE bracket - top single 1"	980	STY1100P	Ø76	x	х		Х
STYLAGE bracket - top single 1"	1530	STY1200P	Ø76	Х			Х
STYLAGE bracket - top double 1"	980	STY2100P	Ø76	х	Х		х
STYLAGE bracket - top double 1"	1530	STY2200P	Ø76	Х			Х
STYLAGE bracket - lateral 1" with scroll	980	STY3050P		Lateral on pole > Ø	90		Х
STYLAGE bracket - wall 1"	980	STY4050P		-		×	Х

Note: this Information is to be combined with the specific technical drawing.

LUMINAIRE COMPATABILITY

				ALBANY Midi	FLEXI	A Midi	CITEA NG	STYLAGE
Family	Туре	Length (mm)	Reference	Suspended male on female 1"	Suspended with fixed 1" gas mounting S3	Suspended female on male 1" adjustable S5	Suspended male on female 1"	Suspended 1" male on female fixed
STYLAGE bracket	Top single 1" Ø76	980	STY1100P	×	×	×	x	х
STYLAGE bracket	Top single 1" Ø76	1530	STY1200P	-	x	х	-	х
STYLAGE bracket	Top double 1" Ø76	980	STY2100P	x	x	x	х	х
STYLAGE bracket	Top double1" Ø76	1530	STY2200P	-	x	x	-	x
STYLAGE bracket	Lateral on pole 1" with scroll	980	STY3050P	-	x	x	-	х
STYLAGE bracket	Wall 1"	980	STY4050P	х	×	×	х	х

x = standard available

INFORMATION FOR EN40 CALCULATION

Name	Reference	Туре	Length (mm)	Centre of pressure on X (mm)	Centre of pressure on Z (mm)	Endpoint bracket on X (mounting point - mm)	Endpoint bracket on Z (mounting point - mm)	CxS (m²)	Weight (kg)
STYLAGE bracket - top single 980 1"	STY1100P	Single	980	282	347	980	208	0.19	8
STYLAGE bracket - top single 1530 1"	STY1200P	Single	1530	470	360	1530	257	0.24	9.5
STYLAGE bracket - top double 980 1"	STY2100P	Double	980	0	327	980	208	0.33	12.6
STYLAGE bracket - top double 1530 1"	STY2200P	Double	1530	0	360	1530	257	0.43	15.3
STYLAGE bracket - lateral 980 1" with scroll	STY3050P	Lateral	980	340	345	980	208	0.136	5.6

